



Rohrsysteme

FERWAG - Cev za daljinsko ogrevanje


Zidno tesnilo
Opozorilni trak

FER
7.355

15.01.2002

Zidno tesnilo

Tip A

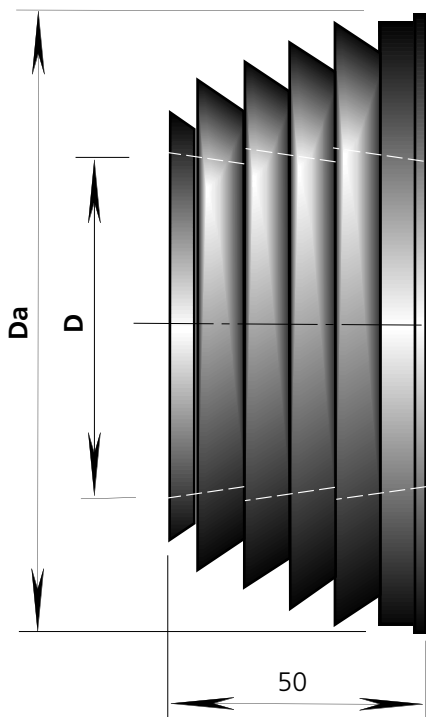

Tip B


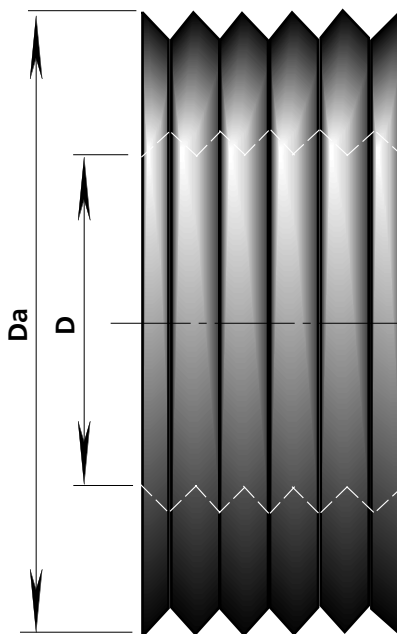


Tabela zidnih tesnil

| D | Tip A Da | Tip B Da |
|-----|-------------|-------------|
| 90 | 133 | |
| 110 | 153 | |
| 125 | 168 | |
| 140 | 183 | |
| 160 | 203 | |
| 180 | 223 | |
| 200 | | 240 |
| 225 | | 265 |
| 250 | | 290 |
| 315 | | 355 |
| 400 | | 440 |
| 450 | | 490 |
| 500 | | 540 |
| 560 | | 600 |
| 630 | | 670 |
| 710 | | 750 |
| 800 | | 840 |

vse dimenzije v mm

Opozorilni trak

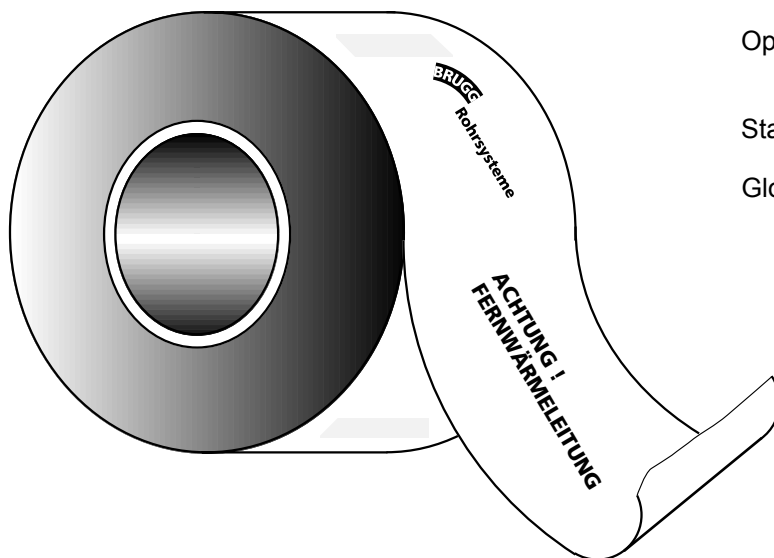

Opozorilni trak za polaganje v zemljo.

Standardna dolžina role je 250 m.

Globina polaganja; glej list FER 7.500.