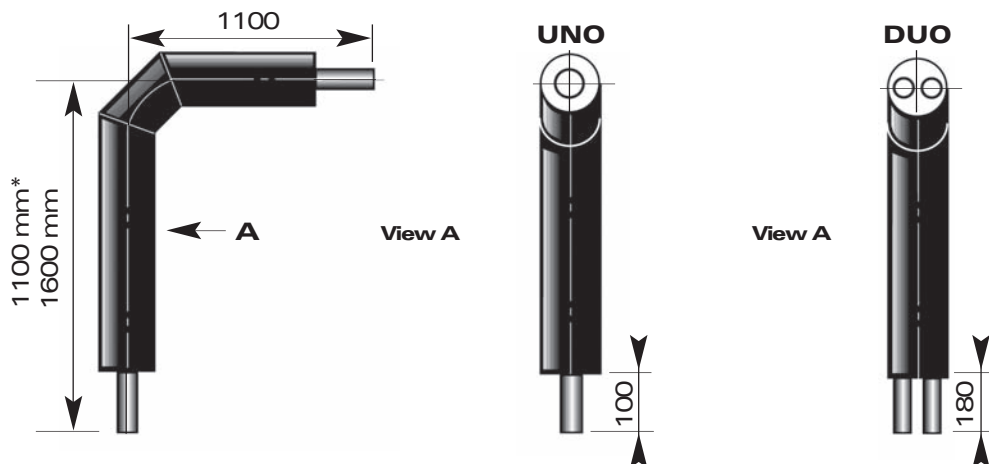


**BRUGG****Rohrsysteme****CALPEX® - Cev za daljinsko ogrevanje****Cevno koleno 90° za vstop v objekt**  
Ogrevanje, 6 bar, UNO in DUO  
Sanitarna cev, 10 bar, UNO in DUO**CPX**  
**6.310****CALPEX® Ogrevanje 6 bar, UNO/DUO**

Tip	DN	Cole ["]	PEX medijska cev d x s mm	Zaščitni plašč D x s1 mm	Kapaciteta l/m	Teža kg/kom
<b>UNO</b>						
25/76	20	3/4"	25 x 2.3	75 x 2.9	0.32	2.30
32/76	25	1"	32 x 2.9	75 x 2.9	0.53	2.50
40/91	32	1 1/4"	40 x 3.7	90 x 3.5	0.83	3.47
50/111	40	1 1/2"	50 x 4.6	110 x 4.3	1.30	4.92
63/126	50	2"	63 x 5.8	125 x 4.9	2.07	6.50
75/142	65	2 1/2"	75 x 6.8	140 x 4.4	2.96	8.47
90/162	80	3"	90 x 8.2	160 x 5.0	4.25	11.40
110/162	100	4"	110 x 10.0	160 x 5.0	6.36	14.23
110/182 PLUS	100	4"	110 x 10.0	180 x 5.6	6.36	16.19
125/182	-	-	125 x 11.4	180 x 5.6	8.20	17.20
160/250*	-	-	160 x 14.6	250 x 6.1	13.43	17.00
<b>DUO</b>						
25+25/91	20+20	2x 3/4"	2x 25x2.3	90 x 3.5	2x 0.32	4.32
32+32/111	25+25	2x 1"	2x 32x2.9	110 x 4.3	2x 0.53	4.67
40+40/126	32+32	2x 1 1/4"	2x 40x3.7	125 x 4.9	2x 0.83	7.42
50+50/162	40+40	2x 1 1/2"	2x 50x4.6	160 x 5.0	2x 1.30	9.90
63+63/182	50+50	2x 2"	2x 63x5.8	180 x 5.6	2x 2.07	13.96

**CALPEX® Sanitarna cev 10 bar, UNO/DUO**

Type	DN	Cole ["]	PEX medijska cev d x s mm	Zaščitni plašč D x s1 mm	Kapaciteta l/m	Teža kg/kom
<b>UNO</b>						
22/76	16	5/8"	22 x 3.0	75 x 2.9	0.20	2.40
28/76	20	3/4"	28 x 4.0	75 x 2.9	0.31	2.65
32/76	25	1"	32 x 4.4	75 x 2.9	0.42	2.80
40/91	32	1 1/4"	40 x 5.5	90 x 3.5	0.66	3.90
50/111	40	1 1/2"	50 x 6.9	110 x 4.3	1.02	5.62
63/126	50	2"	63 x 8.7	125 x 4.9	1.63	7.65
<b>DUO</b>						
28+22/91	20+16	3/4"+5/8"	28.0x4.0 + 22.0x3.0	90 x 3.5	0.31 + 0.20	3.67
32+22/111	25+16	1"+5/8"	32.0x4.4 + 22.0x3.0	110 x 4.3	0.42 + 0.20	4.87
40+28/126	32+20	1 1/4"+3/4"	40.0x5.5 + 28.0x4.0	125 x 4.9	0.66 + 0.31	6.50
50+32/126	40+25	1 1/2"+1"	50.0x6.9 + 32.0x4.4	125 x 4.9	1.02 + 0.42	7.30