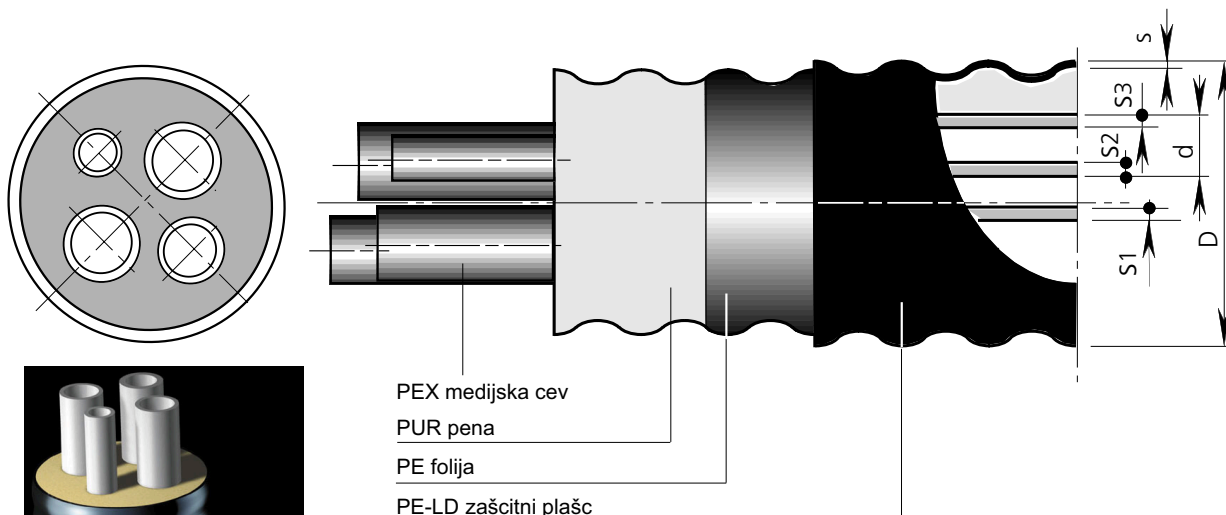


BRUGG**Rohrsysteme****CALPEX® - Cev za daljinsko ogrevanje****Konstrukcija, dimenzije**
Ogrevanje 6 bar, sanitarna cev 10 bar
QUADRIGA**CPX****6.125**

15.01.2002

**CALPEX ogrevanje 6 bar, sanitarna cev 10 bar, QUADRIGA**

Tip	DN	cole ["]	Medijska cev PEX d x s 1-4 mm	Zunanja cev D x s1 mm	Min. radij krivljenja m	Volumen PEX l/m	Teža kg/m	max. dobavna dolžina	
								Boben1) m	Kolut2) m
H25+25/S28+22/142	20	3/4"	25 x 2.3	143 x 3.0	1.1	0.327	3.25	110	169
	20	3/4"	25 x 2.3						
	20	3/4"	28 x 4.0						
	16	5/8"	22 x 3.0						
H32+32/S28+22/142	25	1"	32 x 2.9	143 x 3.0	1.1	0.539	3.39	110	169
	25	1"	32 x 2.9						
	20	3/4"	28 x 4.0						
	16	5/8"	22 x 3.0						
H32+32/S32+22/142	25	1"	32 x 2.9	143 x 3.0	1.1	0.539	3.41	110	169
	25	1"	32 x 2.9						
	25	1"	32 x 4.4						
	16	5/8"	22 x 3.0						
H40+40/S40+28/162	32	1 1/4"	40 x 3.7	163 x 3.2	1.2	0.835	4.15	65	101
	32	1 1/4"	40 x 3.7						
	32	1 1/4"	40 x 5.5						
	20	3/4"	28 x 4.0						

1) **Boben:** zunanji premer 2800 mm x 800 mm (širina)2) **Kolut:** zunanji premer 2800 mm x 1200 mm (širina)

Vecje dolžine na zahtevo. Dostava v kolotu.

Na zahtevo se lahko dostavijo tudi manjše dolžine v kolotu.